

# NEW PRODUCT TURTLE 100 L

NEW!

3 TYPES: **DIESEL, ADBLUE, GASOLINE**



## SECTOR OF DESTINATION



Building  
machinery



Motor boats and  
harbors



Garden  
equipment



Motorbikes  
and scooters



Aggregates



Forklifts

## DIESEL

ITEM	PIUSI PUMP 12 V 50l/min	HORN HAND PUMP	AUTOMATIC NOZZLE PIUSI A60	MANUAL NOZZLE PIUSI	DISPENSING HOSE 4m ¾	K24 METER PIUSI
TDI-100-BLI-VP1-A	▪		▪		▪	
TDI-100-K24-VP1-A	▪		▪		▪	▪
TDI-100-K24-VP1-M	▪			▪	▪	▪
TDI-100-BLI-K10-M		▪		▪	▪	
TDI-100-BLI-VP1-M	▪			▪	▪	

## ADBLUE


ITEM	PIUSI PUMP 12 V 50l/min	HORN HAND PUMP	AUTOMATIC NOZZLE PIUSI A60	MANUAL NOZZLE PIUSI	DISPENSING HOSE 4m ¾	K24 METER PIUSI
TAD-100-BLI-VP4-A	▪		▪		▪	
TAD-100-K24-VP4-A	▪		▪		▪	▪
TAD-100-K24-VP4-M	▪			▪	▪	▪
TAD-100-BLI-PHP-M		▪		▪	▪	
TAD-100-BLI-VP4-M	▪			▪	▪	

## GASOLINE

ITEM	TUTHILL 12 V PUMP TILL 30l/min, ATEX	HORN HAND PUMP, ATEX	AUTOMATIC NOZZLE, ATEX	MANUAL NOZZLE,	DISPENSING HOSE 4m ¾	K24 METER PIUSI
TGA-100-BLI-RD8-A	▪		▪		▪	
TGA-100-K24-RD8-A	▪		▪		▪	▪
TGA-100-K24-RD8-M	▪			▪	▪	▪
TGA-100-BLI-K10-M		▪		▪	▪	
TGA-100-BLI-RD8-M	▪			▪	▪	

## TECHNICAL DATA

Plastic weight:	8,5 kg
Equipment weight:	~16,5 kg
Capacity:	100L, buffer 10L
Dimensions:	Height: 1140 mm Width: 620 mm Depth: 520 mm
Available colours:	green – diesel blue– AdBlue black– gasoline
Packing, loading:	carton box max 3 psc on euro pallet, (pallets not stacking)
Raw material:	extruded 100% (full compound) diesel, adblue – polyethylene gasoline – crosslink polyethylene

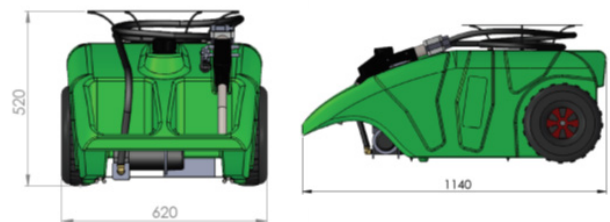



	TURTLE DIESEL	TURTLE ADBLUE	TURTLE GASOLINE
NOZZLE:	PIUSI A60 automatic PIUSI manual	PIUSI A60 automatic PIUSI SB325 automatic PIUSI manual	Automatic nozzle, ATEX Manual nozzle, ATEX
PUMP:	K10C pump –Horn, piston handpump, efficiency 0,25 l/ stroke (lever movement); certified by ATEX: EX II 2/2 G c T3, used in TDI and TGA PIUSI 12V PIUSI 24V	PIUSI 12 V PIUSI 24 V PIUSI handpump-0,38 l / 1 lever rotation	RD8 pump –producer Tuthill, model RD812BN, efficiency 30 l/m, 12V Power, dedicated to TGA. K10C pump –Horn, piston handpump, efficiency 0,25 l/ stroke (lever movement); certified by ATEX: EX II 2/2 G c T3, use din TDI and TGA
HOSE:	From 4m up to 8 m ¾"	From 4m up to 8 m ¾"	From 4m up to 8 m ¾"
METER:	No meter K24 meter	No meter K24 meter	No meter K24 meter
ADDITIONAL EQUIPMENT:	Accumulator–additional equipment for TDI and TAD , capacity 15 Ah, what gives approx. 30 minutes of VP1 pump works. Battery recharging: approx. 8h. Included: charger with diode signaling charge status.		
HOSE HOLDER:	Steel, powder coated, fixed by inserts embedded into the plastic.		
NOZZLE BLOCKADE:	Comfortable protection preventing nozzle fall during transport.		
WHEELS:	Diameter 300 mm, on roller bearing, pumped, weight limit 70 kg on 1 wheel		
PACKING:	Packing in a carton box of each piece separately. Loading maximum of 3 cartons on one euro pallet. The dimension of cartonbox: 1170 x 650 * 550 mm. The height of the pallet with 3 carton boxes: 1800 mm.		

## AUTHORIZED DISTRIBUTOR

